

Designing Smart Energy System for Smart City through Municipal Solid Waste to Electricity: Techno-Economic Analysis

Desti Octavianthy¹, Widodo Wahyu Purwanto^{1*}

¹Department of Chemical Engineering, Kampus UI Depok 16424, Depok, Indonesia

Abstract. Smart energy system is one of the important infrastructures for building smart city. Waste to energy (WtE) is an innovative solution using municipal solid waste (MSW) as a source for electricity. This research was conducted to design WtE Plant in Depok and to assess economic viability of different business models. The technologies applied in WtE are anaerobic digestion and gas engine to generate electricity. The simulation was conducted using SuperPro Designer and UniSim Design software to evaluate the technical performances of electricity production from organic solid waste. The feasibility of project implementation of various business models are evaluated through economic analysis. The result of this study shows that the organic fraction of municipal solid waste in Depok has potential to generate electricity up to 28 MW. From economic aspect, pay off business scheme greatly affects the value of NPV and IRR. Meanwhile, the intervention scheme on fiscal incentives and low loan interest rate have slight effect on IRR values. A combination of Viability Gap Fund (VGF) and increased tipping fees intervention scheme is an optimum business scheme to build WtE plant and achieve electricity price below the off-taker's willingness-to-pay.

1 Introduction

Smart city is a sustainable and efficient urban concept that can provide a high quality of life for residents through optimal resource management by utilization of new technologies to transform the urban existing systems, operations and services through participatory of governance. One of the most important infrastructures in the smart city development is energy sector due to the public utility services for urban society. Therefore, the implementation smart energy system through waste to energy (WtE) in smart city is needed to fulfill energy demand for the city in sustainable way using waste produced from urban activities.

Energy demand in Indonesia continues to increase in line with economic growth and population [1]. Power generation in Indonesia is still dominated by fossil fuels, which is about 80%. Renewable energy plays a smaller role, which is about 15%. The most renewable based power generation consists of hydropower and geothermal power plants, each comprising 10% and 5% installed in Indonesia [2]. The high use of fossil fuels for electricity generation can lead to increased GHG emissions.

Therefore, WtE are needed to mitigate its negative effects on the environment, especially CO₂ emissions. In addition, another crucial issue is high production of

municipal solid waste in some urban areas. WtE can also reduce waste problem. Waste which generated in urban area can be utilized as an energy source to generate electricity.

Currently, there are some studies on smart energy system in smart city. Various methods of development for smart energy system have been widely applied in cities in developed and developing countries, such as the cities of Barcelona, Seoul, and Hanoi.

In Stephan Meier's work [3] is discussed the development of smart energy system through the utilization of solar thermal and photovoltaic for building in Austria. Furthermore, there is a study on waste to energy through incineration technology in Macau [4]. Meanwhile, smart energy systems for transportation sectors are applied to Barcelona and Seoul [5]. This study adapts WtE in Hanoi, Vietnam where urban waste can be converted to electricity up to 6.85 GWh/year [6]. However, there has been no study on economic evaluation of WtE, especially for project funding schemes.

Rapid economic growth in Indonesia has created a significant increase consumption level, which leads to an increased number of municipal waste generations per capita. With 1.7 million inhabitants with population growth of 4%, waste generation rate will increase steadily as the economic growth continues in Depok [7].

* Corresponding author: widodo@che.ui.ac.id

Depok is a city in West Java which produced high amount of waste generation up to 766 m³ or 766,000 litres of waste per day [8]. Household is most contributed for organic solid waste produced for about 54% of total waste production [9]. Currently, Depok has Cipayung landfill as the final waste dumping place where waste has not been able to be utilized optimally. Hence, WtE technology with an appropriate project funding scheme as an alternative solution.

The objective of this study is to analyze technical performance of a smart energy system via WtE through conversion of municipal solid waste into electricity by anaerobic digestion and gas engine power plant. This study is also to find an appropriate business scheme to achieve electricity price below offtaker's willingness-to-pay.

2 Method

2.1. Process Description and Performances

2.1.1 Anaerobic Digestion

Anaerobic digestion is a WtE technology that involves a biochemical process in which organic waste will decompose by anaerobic microorganisms in the absence of dissolved oxygen (anaerobic condition) [10]. Anaerobic microorganisms digest organic material which is converted through anaerobic degradation to a more stable form resulting in a high energy biogas which main composition consists of methane (CH₄) and carbon dioxide (CO₂). There are several key parameters that must be maintained during digestion process in digester. Table 1 shows key parameters of digester.

Table 1. Key Parameter of Digester

Key Parameter	Operating Condition
Temperature (mesophilic, °C)	40
C/N ratio	25
Pressure input, bar	1
Hydraulic retention time, days	30

Kinetic reaction of biogas production uses Monod model [11].

$$r = -\mu \left(\frac{X}{Y} \right) \quad (1)$$

Where r represents the rate of reaction, X is the total biomass, Y is the yield, and μ is the bacterial growth rate defined as:

$$\mu = -\mu_m \left(\frac{S}{K+S} \right) \quad (2)$$


Where S is the substrate concentration and k is the rate constant. The rate constant is defined as:

$$k = 0.8 + 0.0016 \times e^{0.06 \times S} \quad (3)$$

This equation may apply to the reaction of digestion in the temperature range 20°C to 60°C in order to apply the value of μ_m :

$$\mu_m = 0,013T - 0,129 \quad (4)$$

The chemical reaction of food waste conversion to biogas can be described below:



2.1.2 Biogas Treatment

The gas formed from the digestion process as raw biogas is processed into the chemical solvent absorber to remove H₂S and reduce CO₂ content to prevent mechanical corrosion before it flows to the gas engine unit. Solvent used for sweetening biogas is methyl diethanolamine (MDEA). Tertiary amine, such as MDEA exhibit a selectivity for H₂S over CO₂ when contacting gas streams containing both acid gases [12]. MDEA is then regenerated in desorber column. H₂S removal efficiency can define as:

$$\eta_{H_2S \text{ removal}} = \frac{\% \text{mole } H_2S \text{ in sweet biogas}}{\% \text{mole } H_2S \text{ in biogas}} \quad (6)$$

$$H_2S \text{ removed/kj} = \frac{H_2S \text{ removed (kmol)}}{Q \text{ (kj)}} \quad (7)$$

2.1.3 Gas Engine Power Generation

Gas engine is an internal combustion engine which runs on a gas fuel, such as biogas and natural gas. Gas engine has thermodynamic principle, namely Otto cycle. Compression ratio in gas engine is 1:9.5 to 1:11 [13]. Equivalence ratio air-fuel can be described as:

$$\phi = \frac{AFRS}{AFR \text{ actual}} \quad (8)$$

Where ϕ is equivalent air-fuel ratio and AFRS is air-fuel ratio stoichiometry. Adiabatic flame temperature from combustion for biogas is 1872°C. Thermal efficiency from combustion process is defined as:

$$\eta_{th} = \left(1 - \frac{1}{r^{k-1}} \right) \quad (9)$$

where k is heat capacity ratio. Meanwhile, electrical efficiency of the cycle can be formulated as:

$$\eta_{el} = \frac{W_{net}}{Q_{in}} = \frac{3600}{LHV \times \frac{Q_{gas}}{W}} \quad (10)$$

2.2. Process Simulation

2.2.1 Production and Treatment of Biogas

A mass and energy balance model of the anaerobic digestion system simulated by SuperPro Designer software. Figure 1 shows process flow diagram of biogas

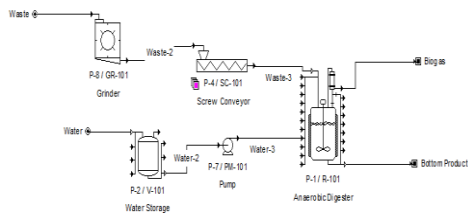


Fig.1. Process Flow Diagram of Biogas Production

production. Due to biogas properties that hydrogen sulphide content must be less than 5 ppm flows to the gas engine, then the biogas is sweetened using chemical solvent absorption. Biogas sweetening simulation was done by using UniSim Design software. Process flow diagram of biogas sweetening process is described on Figure 2.

Sweet biogas is then mixed with air before it flows to gas engine for combustion. Gas engine power plant simulation was done by using UniSim Design software. Air-fuel ratio in gas engine is 1:11, while the input pressure of biogas to gas engine is 2 bars. Meanwhile, compression ratio in gas engine reaches 1:11.

2.2.2 Model Description and Assumption

Input waste is assumed to have been segregated so that only the organic waste fraction is inputted into the simulation. Before organic waste is fed into digester, its size is reduced to 0.2 mm by grinder in order to maximize biogas produced. Organic waste is fed into anaerobic digester using screw conveyor and water is pumped into anaerobic digester with ratio waste and water 1:1.95 respectively. The amount of waste inputted into the system is set at 414 m³. It requires 30 digesters to convert waste into biogas continuously with each volume of digester is about 1,822 m³.

In order to remove hydrogen sulphide content in biogas, sweetening process by using absorption technology is required. Biogas which generated from biodigester flows into the absorber package which consists of absorber, desorber, also involves some equipment's, such as heat exchanger, valve and pump to regenerate MDEA as a solvent. Biogas flows through compression and combustion process in gas engine power plant. Figure 2 describes process flow diagram of WtE.

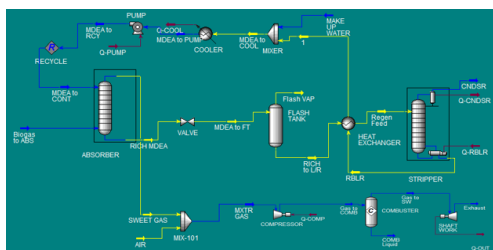


Fig.2. Process Flow Diagram of WtE

2.2. Economic Analysis

Some scenarios of business models and project financing are identified based on existing regulation on WtE plant in Indonesia and some fiscal and financial incentives. The scenarios as input for economic feasibility analysis through economic feasibility parameters, such as NPV, IRR, and PBP to find out workable business scheme. Table 2 provides some scenarios of business models and financing schemes of WtE.

Table 2. Scenarios of Business Model

Name	Business Model	Detail Scenario
BMB	Base Case	<ul style="list-style-type: none"> Loan interest rate: 6.5% Income tax: 25% Exemption of import duty Electricity price : Rp 910/kWh (6.5 cent/kWh) - MEMR No. 1404 K/2017 Tipping fee : US\$ 10/ton of waste
BMFI-1	Fiscal Incentives-1	Income tax rate exemption
BMFI-2	Fiscal Incentives-2	30% net income deduction is charged for each 6 years at 5% per annum - MOF No.21 /2010
BMLI	Low Loan Interest	Low loan interest from International support : 3%
BMVGF	Viability Gap Fund	50% of capital investment from government - MOF No.223/PMK.011/2012)
BMTF	Increased Tipping Fee	Increased revenue from tipping fee : US\$ 50/ton of waste
BMG	Grant	100% grant of capital investment from International support
BMP	Electricity pricing	Electricity price : \$0.14/kWh - Presidential Decree No.4/2016
BMP & BMLI	Combined BMP and BMLI	<ul style="list-style-type: none"> Electricity price : \$0.14/kWh - Presidential Decree No.4/2016 Low loan interest : 3%
BMP, BMVGF, BMTF	Combined BMP, BMVGF, and BMTF	<ul style="list-style-type: none"> Electricity price : \$0.14/kWh - Presidential Decree No.4/2016 50% grant of capital

		investment from government - MOF No.223/PMK.011/2012 <ul style="list-style-type: none"> Increased revenue from tipping fee : US\$ 50/ ton of waste
BMVGF, BMTF, BMFI-1	Combined BMVGF, BMTF, and BMFI-1	<ul style="list-style-type: none"> 50% grant of capital investment from government - MOF No.223/PMK.011/2012 Increased revenue from tipping fee : US\$ 50/ton of waste Exemption of income tax rate

3 Result and Discussion

3.1. Technical Performance

3.1.1 Biogas Production and Treatment

According to the simulation result, the composition of biogas consist of 56.68% mole of methane, 30.05% mole of CO₂, 11.56% mole of N₂, and 1.71% mole of H₂S. The organic waste in Depok has potential to produce methane about 99,837 sm³/day and generate biogas for about 176,142 sm³/day. A ton of organic waste can generate biogas up to 425.5 sm³. Lower heating value of biogas generated is about 17.8 MJ/kg.

The composition of biogas before and after sweetening process is described in Table 3.

Table 3. Composition of Biogas Before and After Sweetening

Component	Composition of Feed Biogas (% mole)	Composition of Biogas Treated (% mole)
CH ₄	56.7	63
CO ₂	30	25
H ₂ S	1.7	0.0001
N ₂	11.6	12

The composition of H₂S in treated biogas becomes 0.48 ppm or equivalent to 0.0001% mole. This indicates that biogas is feasible and meets the requirements as a fuel for gas engine. H₂S removal efficiency reaches 99.9% while CO₂ removal efficiency is about 17% (as CO₂ is not main constraint to be removed). It requires 6.4 mole of MDEA to remove 1 mole H₂S content. According to the Equation (8), in order to removing H₂S content and decrease CO₂ content in biogas, it requires electrical energy about 2.57 kW and thermal energy about 130,126 MJ/h.

3.1.2 Power Generation

Adiabatic flame temperature that produced from combustion process is 1870°C, while thermal efficiency obtained is 45%. Biogas produced from organic waste in Depok has potential to generate electricity up to 28 MW with capacity factor of 0.7. Heat rate which obtained from simulation result is 10,384 kJ/kWh. This power plant requires total electricity for compressor, pump, grinder, and conveyor for about 18 MW. Therefore, total electricity that can be sold to offtaker is about 10 MW. Electrical efficiency of power plant is 35%.

Figure 4 is a summary of the quantity of flow in the form of efficiency ranging from waste into electricity that is illustrated through the Sankey Diagram.

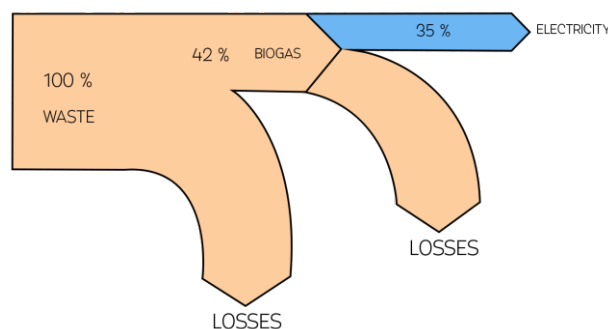


Fig.3. Sankey Diagram

Losses from waste conversion to biogas is in the form of sludge, while losses from biogas conversion to electricity is in the form of heat waste.

3.2. Economic Performance

3.2.1 Investment Cost

Investment cost of WtE consists of total direct cost and indirect cost. Total direct cost includes equipment cost, land and building cost, service facilities, piping and instrumentation. Total indirect cost includes construction expenses, contactors fee, engineering and supervision, also contingency. Total Capital Investment of WtE is about US\$ 119,917,901. Total investment cost of WtE reaches US\$ 4,158/kW. This result is fits within the investment cost range based on IRENA [14].

3.2.2 Operating Cost

Operating cost of waste to energy plant consists of variable cost and fixed cost. Variable cost includes labor cost, utility cost, and waste logistic cost. Fixed cost includes insurance, tax, and distribution cost. Total operating cost of WtE is about US\$ 3,669,481/year which corresponding to 3% of Total Capital Investment Cost.

3.2.3 Biogas Production and Treatment Cost

Total biogas production cost includes investment cost and operating & maintenance cost. Due to biogas is from waste, so there is no fuel cost in biogas production cost breakdown. Total production cost of biogas reaches US\$ 0.12/ m³ methane.

3.2.4 Electricity Production Cost

Total annual cost of electricity production is US\$ 9.547.349/year while annual electricity produced is 63.360.000 kWh/year. Cost of electricity production reaches US\$ 0.15/kWh.

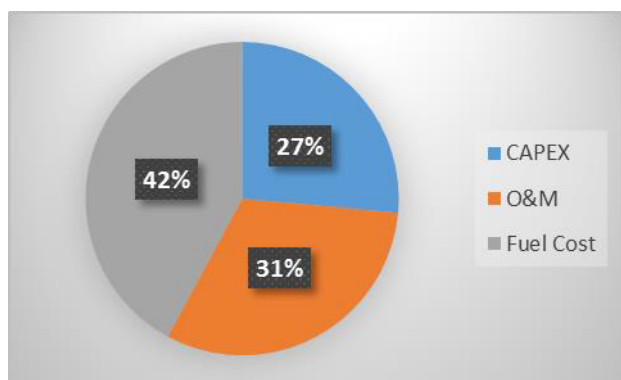


Fig. 4. Electricity Production Cost

3.2.5 Optimum Business Model

Electricity tariff from WtE is about Rp 3,579/kWh. Meanwhile, the government has regulated feed in tariff (FiT) in accordance with Presidential Decree No.4/2016 for electricity selling price of WtE worth Rp 1,800/kWh in West Java. This makes FiT so unattractive. Therefore, a change on FiT is required. Some intervention schemes on CAPEX, financial, and fiscal incentives are also required if there are no changes on FiT. Some scenarios of business models/interventions that described on Table 4 are evaluated by economical parameters.

Table 4. Intervention Scheme Results

Name	NPV	IRR (%)	PBP (year)	Electricity tariff (Rp/kWh)
BMB	-115,295,113	-	-	3,579
BMFI-1	-99,242,823	-	-	3,356
BMFI-2	-106,107,364	-	-	3,390
BMLI	-98,731,113	-	-	3,120

BMVG F	-43,738,125	-	-	2,086
BMTF	-54,349,779	-	-	2,372
BMG	90,861,730	29.6	5	703
BMP	-73,004,564	-	-	3,085
BMP & BMLI	-65,410,384	-	-	2,820
BMP, BMVG F & BMTF	34,987,358	14.6	7	1,273
BMVG F, BMTF & BMFI-1	1,154,919	8.3	10	1,423

The results show that pay off business scheme greatly affects the value of NPV and IRR. Meanwhile, the intervention scheme on fiscal incentives and low loan interest rate have slight effect on IRR values.

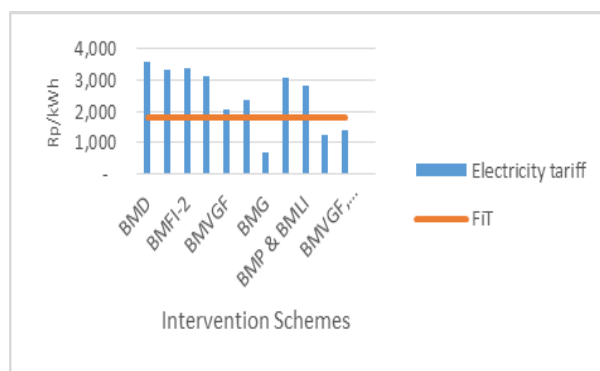


Fig. 5. Electricity Tariff

Based on calculation, a proper funding scheme to achieve the willingness-to-pay offtaker is the BMG funding scheme, a combination of SPP funding scheme, SPVGF & SPTF, and a combination of SPVGF, SPTF & SPFI-1 funding schemes in which these three business models has IRR greater than MARR (8%). From all of the intervention schemes, the best business model for WtE is a combination of SPP, SPVGF & SPTF funding scheme. This business model has IRR for about 14.6% and obtained electricity price for about Rp 1,273/kWh. Payback period obtained is 7 year which means that this business model is optimum and feasible to build WtE.

3.3. Environmental Analysis

WtE processing also generates CO₂ emission. From the simulation results, CO₂ intensity that produced from WtE plant is about 357 gCO₂-eq/kWh. Comparison of CO₂ intensity from various sources are provided on Figure 6.

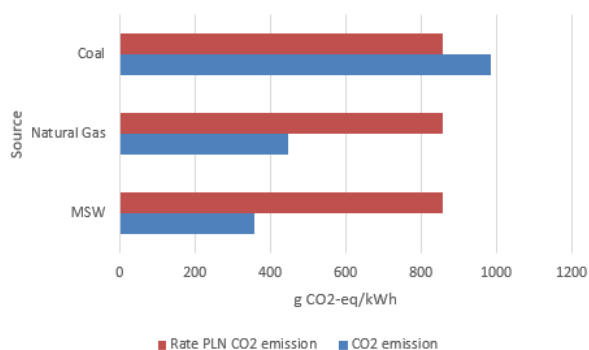


Fig.6. Comparison of CO₂ Intensity

According to the results, municipal solid waste (MSW) is more environmental friendly than other sources. The differentiation of CO₂ intensity between MSW and rate of PLN reaches 500 gCO₂-eq/kWh. This result indicates that production of electricity from waste can reduce CO₂ emission up to 31,671 ton CO₂-eq/year comparing to CO₂ intensity of PLN's rate. Therefore, waste to energy is a promising alternative because it produces less CO₂ emission than other sources.

4 Conclusion

High production of municipal solid waste in urban areas have been promoted as the big issue due to urbanization. The most common type of waste produced in urban areas is organic waste. Anaerobic digestion is reliable technology to convert waste into energy outright reducing the amount of organic waste drastically. Waste to energy (WtE) is a promising alternative to fulfill energy demand of urban society.

Besides reducing the amount of waste, WtE generates low CO₂ emission so it is environmentally friendly. However, the investment cost of WtE is high so that the cost of electricity production becomes expensive compared to the other energy sources from fossil fuels. Therefore, the funding intervention schemes are analysed to make WtE becomes attractive and feasible to be developed.

Acknowledgement

The funding of this research/article's publication is supported by the United States Agency for International Development (USAID) through the Sustainable Higher Education Research Alliance (SHERA) Program for Universitas Indonesia's Scientific Modeling, Application, Research and Training for City-Centered Innovation and Technology (SMART CITY)

Project, Grant #AID-497-A-1600004, Sub Grant #IE-00000078-UI-1 No. 0142/UN2.R3.SC/HKP.05.01/2018.

References

1. World Bank. *Rasio elektrifikasi di Indonesia*. The World Bank Group (2013)
2. World Bank. *Konsumsi bahan bakar fosil di Indonesia*. The World Bank Group (2014)
3. Maier, S. Smart energy systems for smart city districts: case study Reininghaus District. *Energy, Sustainability, and Society* **6** : 23 (2016)
4. Qingbin, Song., et al. Characterizing the essential materials and energy performance of city buildings: A case study of Macau. *Journal of Cleaner Production* **194** : 263-276 (2018)
5. Grimaldi, D., Vicenc Fernandez. The alignment of University curricula with the building of a Smart City: A case study from Barcelona. *Technological Forecasting & Social Change* **123** : 298-306 (2017)
6. Nguyen, H., Heaven, S. Energy potential from the anaerobic digestion of food waste in municipal solid waste stream of urban areas in Vietnam. *International Journal Energy Environment* **5** : 365–374 (2014)
7. Kristanto, Gabriel Andari., Irma Gusniani., Aristiati Ratna. The performance of municipal solid waste recycling program in Depok, Indonesia. *International Journal of Technology* **2** : 264-272 (2015)
8. Centre of Environmental Technology, BPPT. *Produksi limbah pada kota-kota besar di Indonesia*. Final Report: Municipal Solid Waste Technology (2016)
9. United Nations Centre for Regional Development. *Data komposisi limbah padat perkotaan di Indonesia*. Final Report: Waste Management Technology (2015)
10. Gunaseelan, V.N. Anaerobic digestion of biomass for methane production: A review. *Biomass and Bioenergy Journal* **6** : 83-144 (2007)
11. Charles, G.Gunerson., David C.Stuckey. *Anaerobic digestion principal and practices for biogas system*. The World Bank, Washington D.C, USA (1986)
12. Mining, S. Francis., Richard, E. Thompson. *Oilfield processing of petroleum volume 1: Natural gas*. PennWell Publishing Company (1991)
13. Moran, Michael J., Howard N. Saphiro. *Fundamental of engineering thermodynamics 7th edition*. John Wiley & Sons, Inc (2010)
14. IRENA. *Investment cost dan fixed O&M of waste to energy*. International Renewable Energy Agency. (2012)